




# RENOVATION PERFECTION

## Floor & stairs

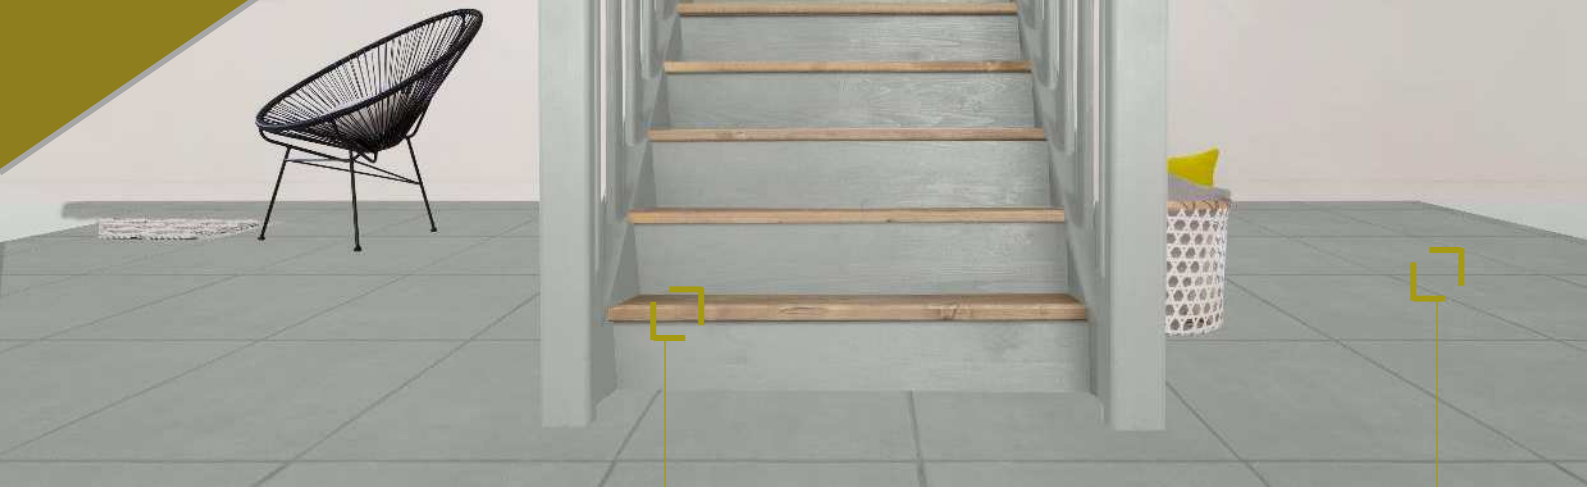

**Parquet floors and stairs**

**Tiled floors**

Tiles, porcelaine stoneware, marble, granit...

### PROPERTIES

Renovation Perfection paint has been specially designed to durably renew highly stressed supports and materials. Thanks to the combination of specific polymers and the Additiv System, a real booster of performance, it offers a high quality finish ready to face all the hazards of everyday life.

### THE INTERIOR FLOOR PAINT TO RENEW YOUR TILES



Size : 750 ml



- **Directly on parquet floor, laminates, tiled floor.**
- **High resistance to frequent traffic.**

### COLOURCHART

SATIN



WHITE



FEATHER



TITANIUM



CARBON



TARMAC



TAUPE



## Floor & stairs

3h

Recoat

Water

Tool cleaning

24h

Fully dry

## TOOLS:



Wide stick or  
Paint stirrer



Round edged paint  
brush



4-5mm short pile roller  
(tiled floors)  
8 to 12mm pile roller  
(wooden floors)

## PREPARATION

### PREPARATION of the surface is ESSENTIAL.

WASH the surface with a soda-based or sugar soap (alkaline) cleaner.

- On laminate and varnished or painted wood in good condition: wash, rinse and allow to dry. Sand (240 grit) and remove dust.
- On oak and raw chestnut: apply a suitable undercoat to block the tannins.
- On raw tiled floor: wash, insist on groutings, rinse and allow to dry.
- On tiled floor already painted in good condition: wash, rinse thoroughly and allow to dry. Sand (240 grit) and remove dust.
- On tiled floor already painted or partially worn: Sand with sandpaper (grade 60 then 120) to return to the original surface. Remove dust, wash, rinse and allow to dry.

## APPLICATION

Apply the paint at room temperature between 12 and 25°C and avoid draughts.

1. Empty the Additiv System (the sachet that is placed under the lid of the tin) into the paint. Stir the paint for 5 minutes, working around the bottom of the tin with a wide stick to mix it well.
  2. Start with the edge of the room with the brush and continue with the roller. Work on small surfaces. Apply from one end to the other. Follow with successive cross strokes. Do not start 2nd coat while it's still drying. Leave to dry for 3h and apply a 2nd coat in the same way.
- Once the sachet has been added, the mixture must be used within less than 10 days to maintain optimal adhesion and performance.

### V33 TIPS

- To clean your painted surfaces, use a gentle detergent and a mop.
  - Optimum product performance and adhesion is achieved after 20 days from application.
- Treat the surface gently, avoiding direct impact, abrasion, staining or cleaning, for the first 20 days after application.

**HEALTH AND SAFETY** : Contains biocidal products (preservatives) : contains C(M)IT/MIT (3:1); 1,2-benzisothiazol-3(2H)-one. May produce an allergic reaction. P102: Keep out of reach of children. P271: Use only outdoors or in a well-ventilated area. P501: Dispose of contents/container to a waste collection center (contact the local authority). Do not allow to freeze. EU limit value for this product (cat A/j - Two-pack reactive performance coatings for specific end use such as floors): 140g/L (2010). This product contains max 33g/L VOC.