

HIGH TACK ADHESIVE

A single component, moisture curing high viscosity elastomeric silane terminated sealant. It cures to form a strong and highly flexible resistant joint with excellent adhesion on most substrates.

DYNA-FIX® High Tack Adhesive can be used indoor or outdoor and offers excellent adhesion on common substrates such as glass, metals, pre-lacquered aluminum, PVC, plastic, wood, polyester, stone, concrete etc.


It is commonly used for bonding materials subjected to vibrations and movement.

Approvals



Features

- No primer required
- Strong adhesion
- Indoor & Outdoor Use
- Excellent UV and aging resistance properties
- Good resistance to vibrations
- No shrinkage, sagging nor stringing

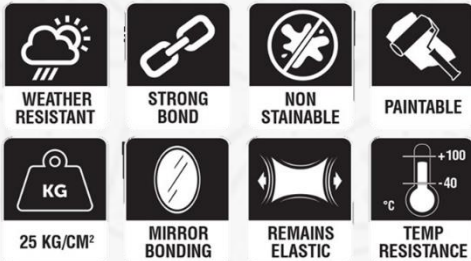

Technical Data

Property	Unit	Value
Skin over time (23°C / 50% RH)	Min	10 - 30
Density @ 20°C	g/ml	1.56
Temperature Resistance	°C	-40 to +100
Application Temperature	°C	5 to 40
Shore A Hardness		60
Overall Appearance		White Paste
Elongation at break	%	>200
UV Resistance		Good
Water Resistance		Good

Surface Preparation

Surfaces must be clean, dry and free of grease, dust, oil and any contaminant to ensure that the bonding process is not compromised. Suitable solvents such as methylethylketone, acetone etc. may be used to clean surfaces.

Shelf Life

12 months from date of production, when stored at or below 25°C in the original unopened container

Instructions

Apply strips 5 to 10 cm apart using either a manual or a pneumatic gun with a triangular nozzle.

No mechanical holding is required in general. For heavier elements, mechanical holding may be required before polymerization.

Once the cartridge is opened, the product should be used within 24 hours otherwise, the product could harden.

Do not apply at temperatures below 15°C.

During curing, contact with non-cured polyurethanes should be avoided.

Packaging

- 300 mL cartridge

Standard Colors

