




DYNA-PRO®

www.saberindustrial.com

sales@saberindustrial.com

+961-9-546 540

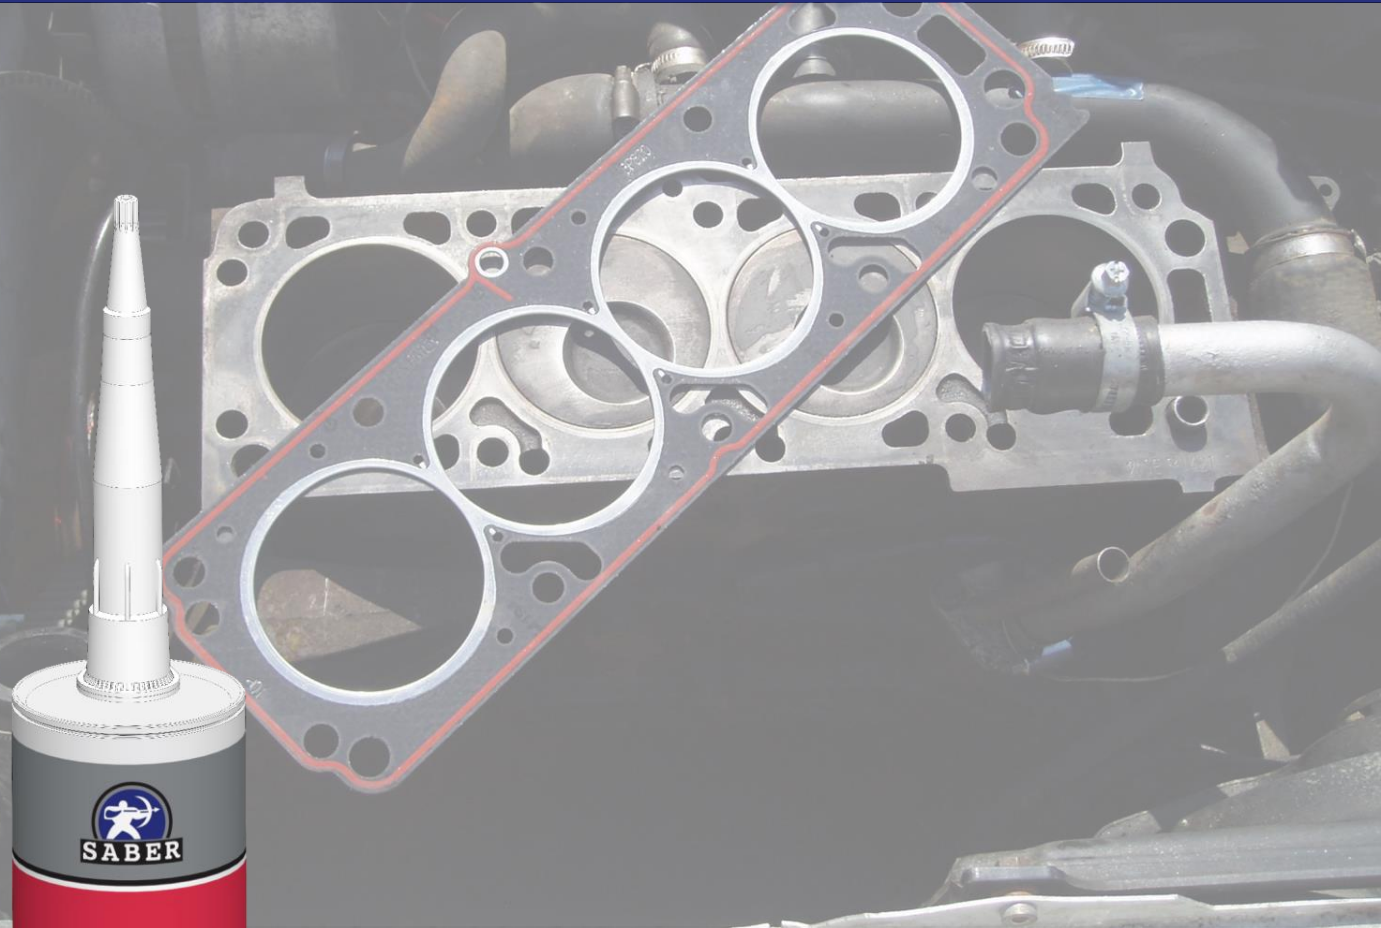

RED RTV GASKET

DYNA-PRO® RED GASKET MAKER is a paste like, single component RTV silicone sealant with exceptional resistance to extreme temperatures, moisture, vibration and chemicals such as oils and anti-freeze. It provides reliable “formed-in-place” gaskets for mechanical assemblies, valve covers, oil pans, intake manifold end seals, timing covers, transmission pans etc...

- HI-TEMP 700°F (UP TO 370°C) TEMPORARILY
- LEAK PROOF
- OIL, WATER & ANTI-FREEZE RESISTANT
- LOW VOLATILE

CAUTION: On contact uncured sealant may cause irritation. See caution- back panel!

NET WT. 3 OZ. (85g)

- HI-TEMP 700°F (UP TO 370°C) TEMPORARILY
- LEAK PROOF
- OIL, WATER & ANTI-FREEZE RESISTANT
- LOW VOLATILE

CAUTION: On contact uncured sealant may cause irritation. See caution- back panel!

NET WT. 3 OZ. (85g)

Features

- High Temperature resistance, up to 370 °C
- Leak proof
- Resistant to Oil, Water and Anti-Freeze
- Resists cracking, shrinking and movement due to mechanical factors and thermal variation
- Low volatility
- Easy to apply, requires NO caulking gun



Technical Data

Property	Unit	Value
Cure system		Acetoxy
Odor		Acetic smell
Specific gravity		1.03 ± 0.01
Hardness (Shore A)		30
Elongation	%	400
Tensile Strength	MPa	1.2
Application temperature	° C	-20 to +50
Temperature resistance	° C	-40 to +370
Tack-free time	Min	10 - 15

Surface Preparation

Surfaces must be clean, dry and free of grease, dust and frost. Make sure to remove all previous material from mating surfaces.

Priming

Product adheres to a variety of non-porous surfaces and given suitable cleaning and old material removal; no additional priming is needed. For specific substrates however, it may be necessary to prime to improve adhesion. Please consult our Technical Service Department.

Instructions

Apply sealant on both surfaces of the gasket in a continuous and even bead of silicone, as shown. Wait 5 minutes for the start of the skin over, then assemble as required. Allow to set for at least 2 hours. For best results, allow to cure overnight.

Shelf Life

12 months from date of production, when stored at or below 30°C in the original unopened container

Packaging

- 85 g Tube
- 280 / 300 mL cartridge

Standard Colors

